


# ME-LGR25 & ME-LGR200

## High-Speed BACnet Routing, Multi-Equipment Control, & Integration

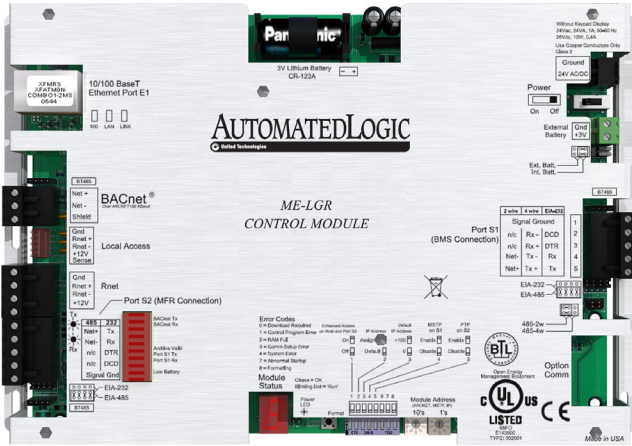

The Automated Logic ME-LGR controllers are an integral component of the WebCTRL® building automation system.

The ME-LGR is a general purpose controller that can be used for a variety of applications. The ME-LGR can act as a BACnet router and a multi-equipment controller. It can also act as a protocol translator, allowing third-party devices to be integrated into the WebCTRL® system.

### Key Features and Benefits

- Provides BACnet routing capabilities between the WebCTRL building automation system backbone (BACnet/IP), and a subnetwork of WebCTRL controllers (BACnet over ARCNET or BACnet over MS/TP)
- Provides multi-equipment control capabilities for general HVAC applications, including complex central plants
- Supports MEx I/O point expanders or previous-generation MX point expanders for scalability. Up to six point expanders can be mounted in a stack or remotely mounted.
- Supports a wide range of open and proprietary TCP/IP and serial protocol drivers, enabling the ME-LGR to serve as a gateway to other manufacturers' equipment
- Supports the Automated Logic line of communicating room sensors and Automated Logic's touchscreen interface
- Tough construction delivers superior performance and reliability. Controllers are constructed with a rugged aluminum cover which provides optimum electrical protection and noise immunity.
- Supports EIKON® graphical programming, an object-oriented tool that provides complete flexibility for any custom control sequence that you need
- Supports live, visual displays of control logic, which use real time operational data to aid in optimizing and troubleshooting equipment and system operation
- Available in two different versions:  
**ME-LGR25** - supports 25 third-party points  
**ME-LGR200** - supports 200 third-party points




The WebCTRL® building automation system gives you the ability to understand your building operations and analyze the results. WebCTRL integrates environmental, energy, security and safety systems into one powerful management tool that allows you to minimize energy consumption, maximize occupant comfort, and achieve sustainable building operations. Our web-based platform allows building managers to control and access information about their HVAC, lighting, central plant and critical processes on premises or remotely at any time of day.



# ME-LGR25 & ME-LGR200

## Specifications

BACnet Support:	Conforms to the BACnet Building Controller (B-BC) Standard Device Profile as defined in ANSI/ASHRAE Standard 135-2012 (BACnet) Annex L, Protocol Revision 9	
Communication Ports:	The following ports are available on the ME-LGR controllers: <b>10/100 BaseT Ethernet:</b> 10/100 Mbps port for BACnet/Ethernet, BACnet/IP, or third-party communications <b>BACnet:</b> EIA-485 port for ARCNET 156 kbps communications <b>Port S1:</b> EIA-232 or EIA-485 configurable port for BACnet MS/TP (9600 bps–76.8 kbps) communications or third-party device communications at various baud rates <b>Port S2:</b> EIA-232 or EIA-485 configurable port for BACnet PTP (9600 bps–115.2 kbps) communications or third-party device communications at various baud rates <b>Rnet:</b> for communicating room sensors and touchscreen displays <b>Local Access:</b> for system start-up and troubleshooting <b>Expansion:</b> for connecting up to six point expanders with a maximum of 192 points	
Microprocessor:	32-bit Motorola Power PC microprocessor with cache memory, Fast Ethernet controller, high-performance 32-bit communication co-processor, ARCNET communication co-processor, and I/O expansion CAN co-processor	
Memory:	16 MB non-volatile battery-backed RAM (12 MB available for use), 8 MB Flash memory, 32-bit memory bus	
Real-time clock:	Battery-backed real-time clock keeps track of time in event of power failure	
Battery	10-year Lithium CR123A battery retains the following data for a maximum of 720 hours during power outages: time, control programs, editable properties, schedules, and trends	
Status indicators:	LED status indicators for communications and low battery status. Seven-segment status display for running, error, and power status	
Router addressing:	Rotary dip switches for intuitive network addressing	
Protection:	Built-in surge and transient protection circuitry for power, communications and I/O	
Listed by:	UL-916 (PAZX), cUL-916 (PAZX7), FCC Part 15-Subpart B-Class A, CE	
Environmental operating range:	-20°F to 140°F (-29°C to 60°C); 10 to 90% relative humidity, non-condensing	
Power requirements:	24 Vac $\pm$ 10%, 50-60 Hz, 24VA, or 26 Vdc $\pm$ 10%, 10W	
Physical:	Rugged aluminum cover, removable screw terminal blocks	
Weight:	1.4 lbs. (0.64 kg)	
Dimensions:	<u>Overall</u> Width: 11 5/16 in. (28.7 cm) Height: 7 1/2 in. (19 cm) Depth: 2 3/4 in. (7 cm) panel depth	<u>Mounting Holes</u> Width: 10 13/16 in. (27.5 cm) Height: 5 in. (12.7 cm)



1150 Roberts Boulevard, Kennesaw, Georgia 30144  
770-429-3000 Fax 770-429-3001 | [www.automatedlogic.com](http://www.automatedlogic.com)

**AUTOMATEDLOGIC**  
United Technologies